


February 2019

MS  **Amlin**

Carriage of fertilizers

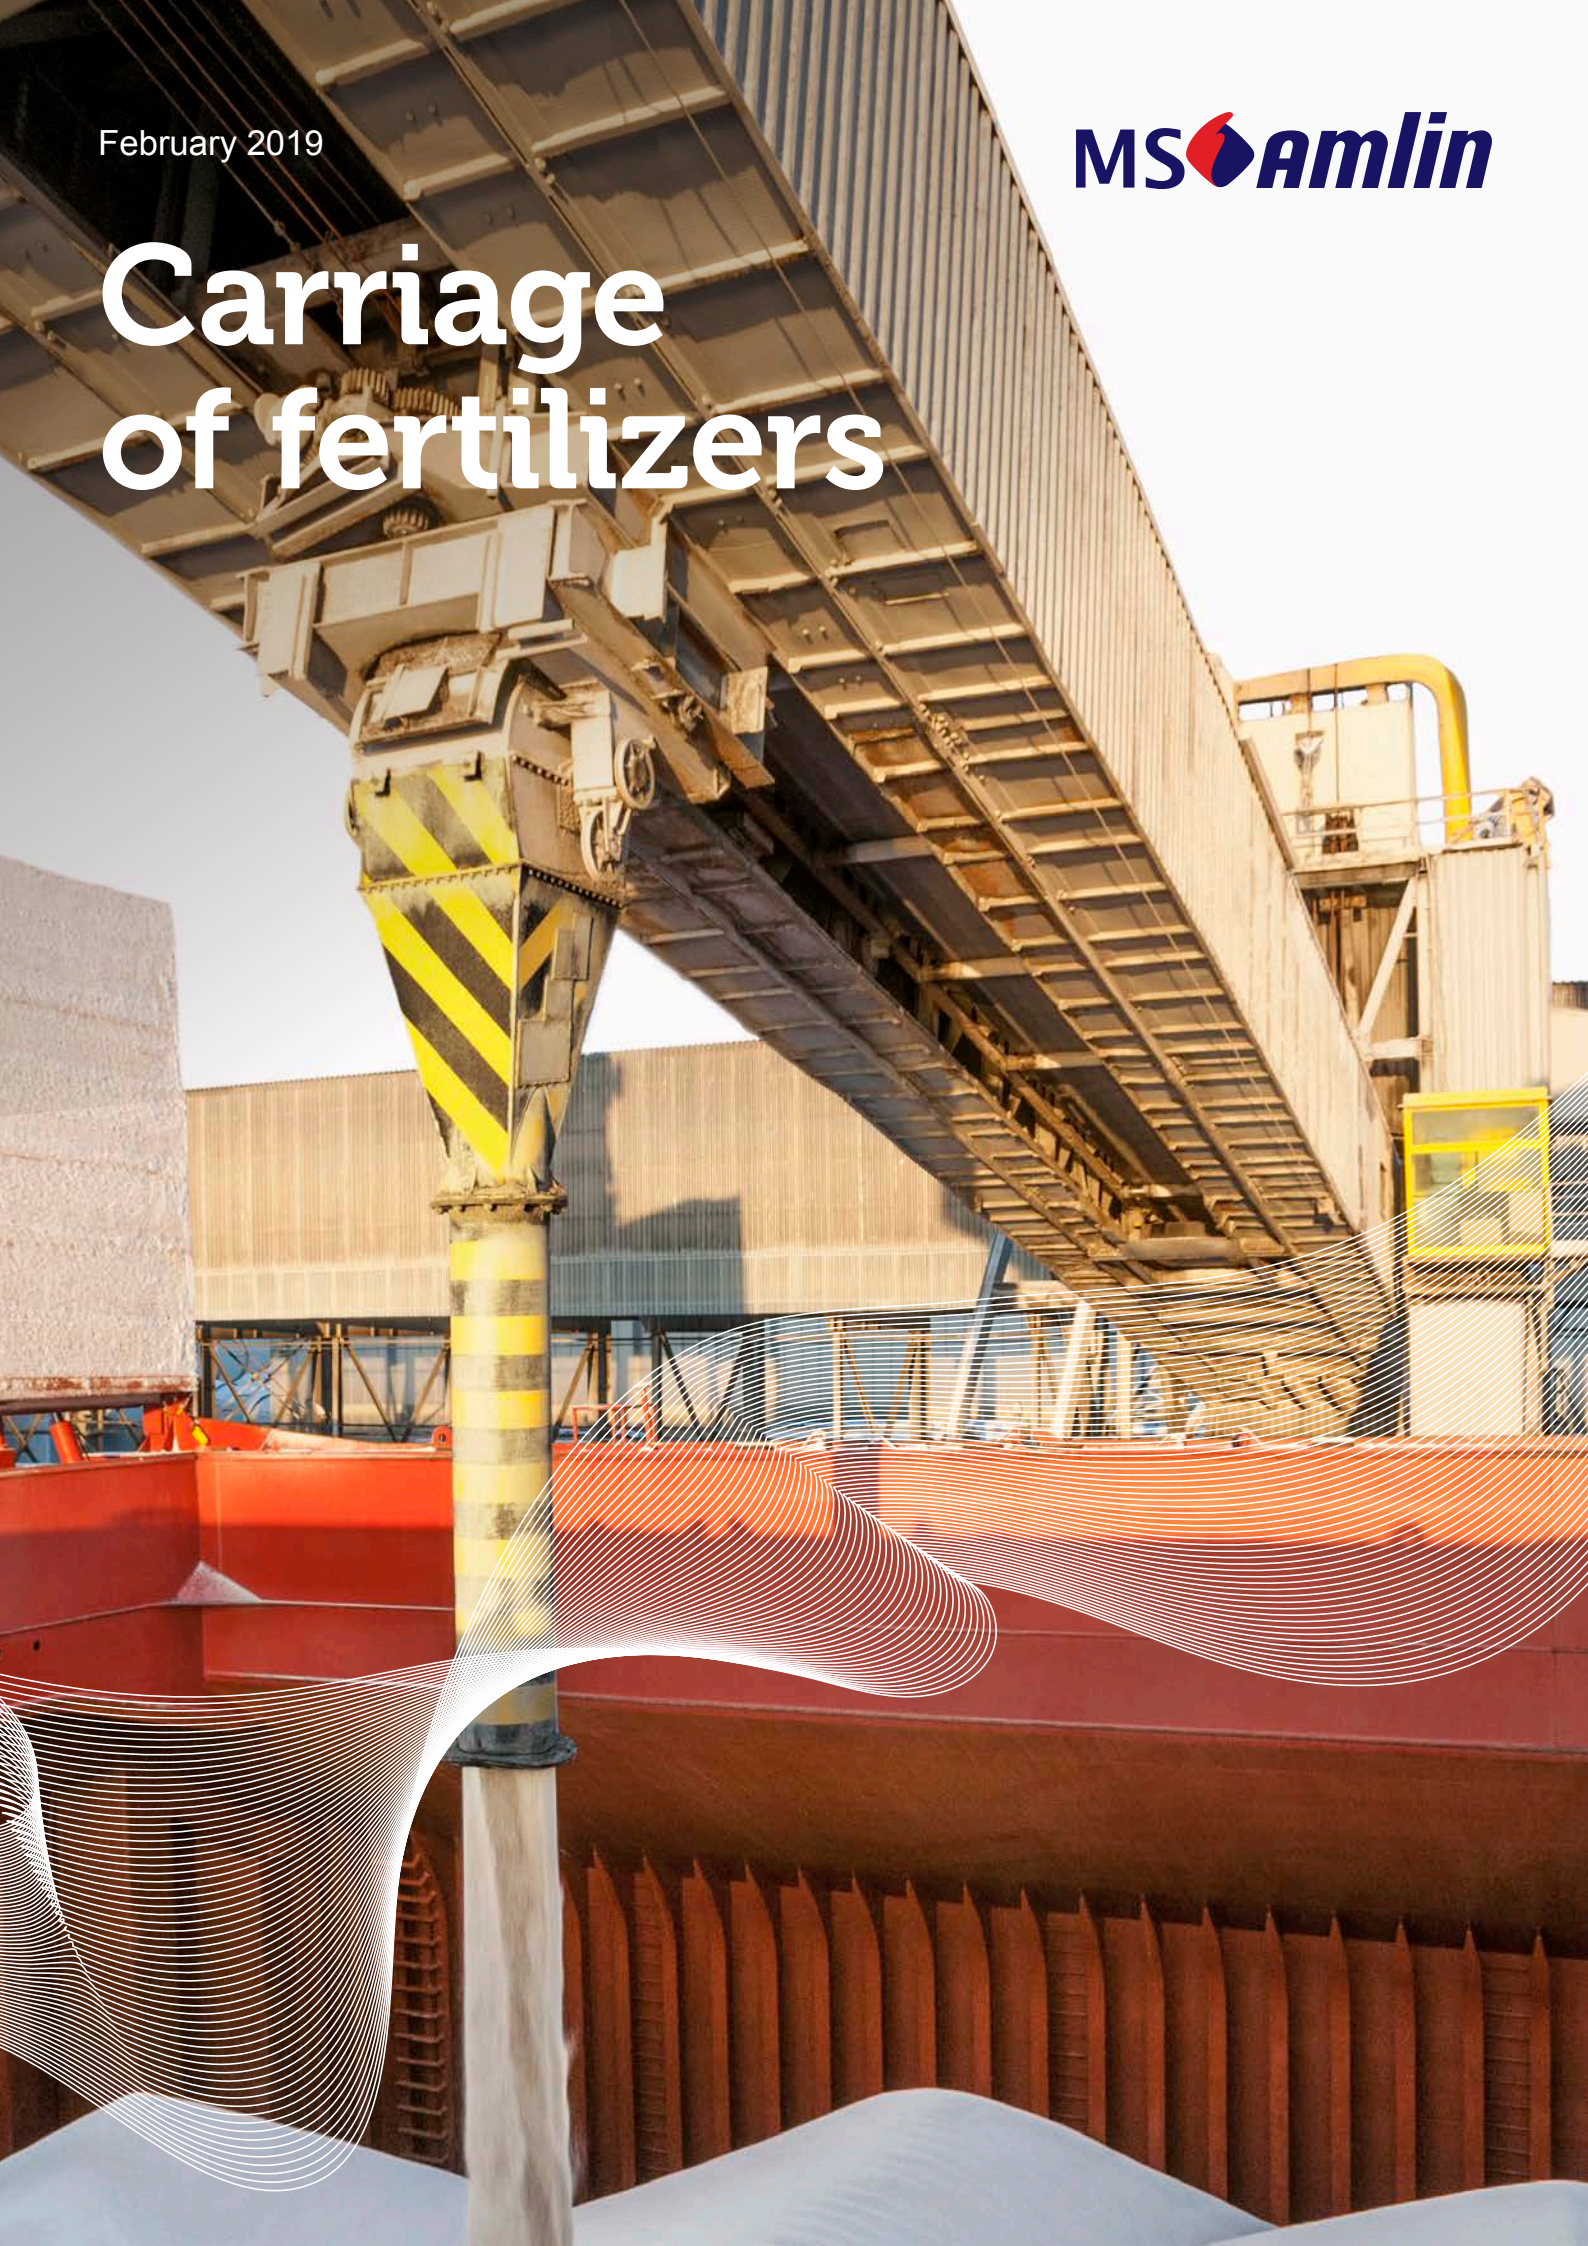

Recently we have seen a number of claims related to cargoes of fertilizers. The most seen claims are wetting or caking of the fertilizer. Burnt fertilizer claims are less frequent but are more devastating and often resulting in a total loss of the vessel. With this circular MS Amlin aims to promote further awareness about the risks associated with the loading and transportation of fertilizers.

What are fertilizers?

Any natural or manufactured material is considered a fertilizer if it contains at least 5% of one or more of the three primary nutrients – Nitrogen (**N**), Phosphorous (**P**), or Potassium (**K**), also referred to as NPK.

There are several types of fertilizers in the market, however the most common are Urea, Ammonium Nitrate and Sodium/Potassium Nitrate.

Urea has no special hazards. It is non-combustible or has a low fire-risk. This cargo (either pure or impure) may, in the presence of moisture, damage paintwork or corrode steel.

Ammonium Nitrate is commonly used in agriculture as a high-nitrogen fertilizer, and it has also been used as an oxidizing agent in explosives, including improvised explosive devices. If heated strongly, this cargo decomposes, giving off toxic and other gases which can trigger combustion. Ammonium nitrate dust can be irritating to skin and mucous membranes.

Potassium Nitrate is a strong oxidizing agent. If shocked or heated or in contact with organic materials this cargo may ignite, causing fire or an explosion.

Sodium Nitrate although non-combustible, mixtures with combustible material are readily ignited and may burn fiercely.

In fact many fertilizers can slowly corrode metals particularly in the presence of water or moisture. Furthermore, all these cargoes are hygroscopic and will cake if damp and wet.

Classification by the IMSBC Code

Some of these products such as Potassium Chloride and Super Phosphate, are harmless, whilst others such as Ammonium Nitrate fertilizers are inherently dangerous and exposed to risk of explosion.

As such, the International Maritime Solid Bulk Cargoes (IMSBC) Code lists fertilizers in different categories.

All fertilizers fall into one of three categories:

- Type A: Oxidizers belonging to Class 5.1;
- Type B: NPK/NP/NK fertilizers capable of self-sustaining decomposition belonging to Class 9;
- Type C: Non-hazardous.

UN Resistance to Detonation Test for class 5.1 (type A) fertilizers

Fertilizers belonging to class 5.1 (Type A), when transported in bulk by sea, need to pass the official UN Resistance to Detonation Test. A test sample is confined in a steel tube and subjected to detonation shock from an explosive booster charge. The test is to be carried out twice in a row. If in each test one or more of the samples is crushed by less than 5% the sample is deemed to satisfy the resistance to detonation requirements. These test certificates must be kept on board. Several European countries demand that the test is not older than 3 months.

Preservation of quality

Fertilizers are normally manufactured as high quality materials in the form of granules. It is in the interest of all parties concerned with the handling and storage of fertilizers to ensure that the quality is maintained right up to the point of usage: namely no moisture pick up or caking, free from contamination and of minimal dust content.

To preserve the quality of the fertilizers, sufficient packing is required. The following methods of packing are used.

1. Packed in customized bags on pallets;
2. In big bags;
3. In flexible intermediate bulk containers (FIBC);
4. Loose in bulk.

Prior to loading the Master should obtain a Material Safety Data Sheet (MSDS) for the cargo to be loaded and should familiarize himself, and comply fully, with the provisions of the IMSBC Bulk Code. This should also include familiarization with the Emergency Procedures.

Furthermore the Shipper should provide the Master with a cargo declaration prior loading together with the relevant additional documentation if the cargo is class 5.1 (Type A).

In addition, the general principles for the preservation of quality of all fertilizers are:

- **Prevention of moisture pick up and caking**

This may require covering bulk material with plastic sheets during storage or transportation and keeping storage buildings closed as much as possible to prevent ingress of moist air. If the passage is subject to variable temperatures, condensation may form on the ship's structure and fall on to the cargo. Therefore, it is of importance that the ventilation is controlled to avoid sweating.

- **Prevention of contamination**

Storage areas should be cleaned before the fertilizer is introduced. Access areas should be kept clean during storage. Spillage should be cleared up as soon as practicable.


- **Prevention of product breakdown**

Fertilizers, particularly of Type A, should not be stored in direct sunlight or in conditions where temperature cycling can occur.

- **Fire and explosion prevention**

Ammonium Nitrate based fertilizers should be stored in an explosion free environment, away from heat sources and open fire. Contamination with oils, acids, organic materials and alkalis should be prevented and adequate fire precautions should be in place.

“Potassium chloride and super phosphate, are harmless whilst others, such as Ammonium Nitrate fertilizers are inherently dangerous and exposed to risk of explosion”.

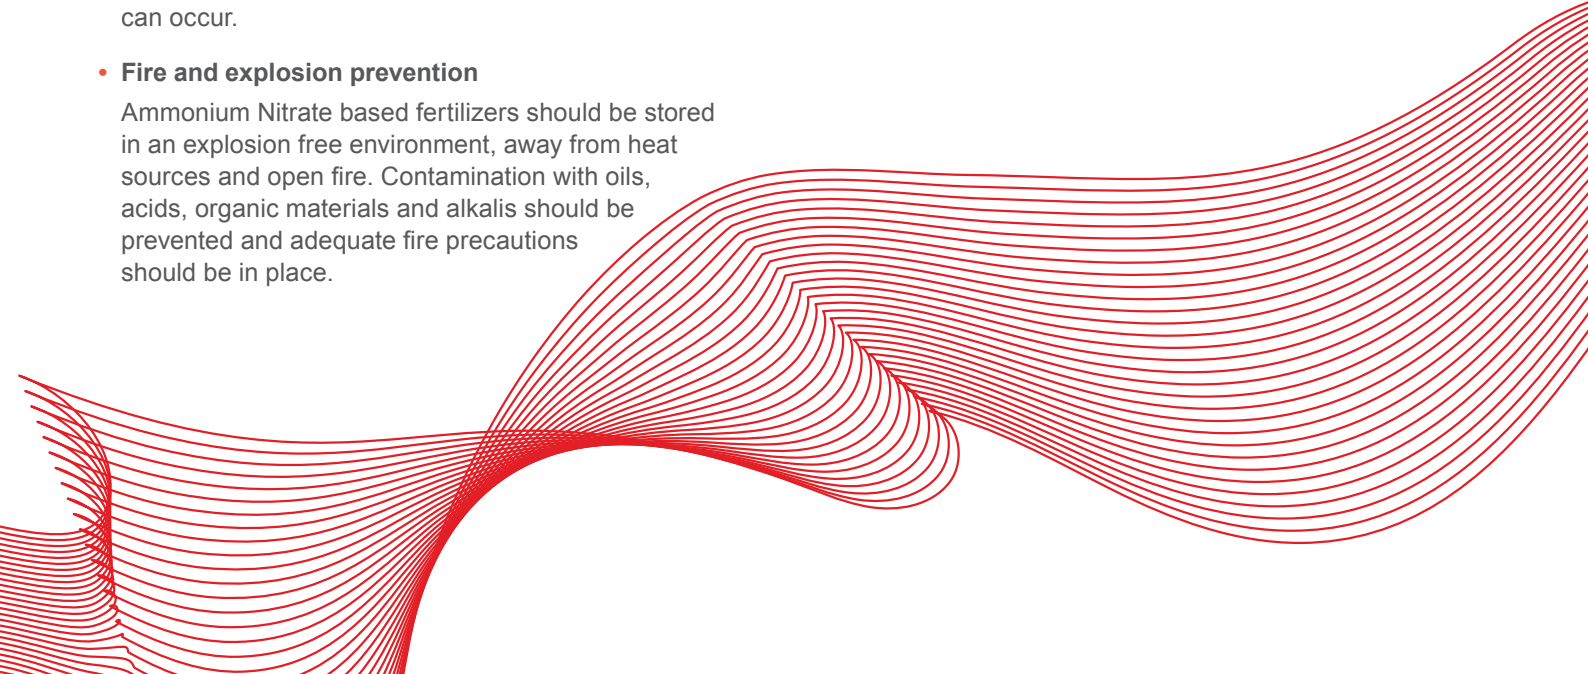

Recommendations

Prior loading any fertilizer, the composition, type, class and corresponding proper safety and emergency procedures must be accurately determined. Once this has been established, the proper MSDS and IMSBC sections must be consulted and followed in full.

The cargo holds must be completely cleaned, washed and rinsed with fresh water and be dry and free from any previous cargo remnants, paint and rust flakes. The hatches must be kept well maintained in a good operating condition without any hydraulic leakages. Rubber hatch cover seals, compression bars, coaming tables must be in clean and undamaged condition and to be inspected weather tightness in seaway conditions.

All sources of heat must be kept away from ammonium nitrate-based fertilizers, regardless of their classification. Potential heat sources include heated double bottom bunker tanks, engine room bulkheads, light bulbs/cargo lights, heating systems, steam pipes, electric motors, live electrical cabling and naked flames. Therefore, all lights and other heat sources in cargo holds should be switched off prior to loading and should remain off throughout the voyage and as long as the fertilizer is on board.

Electrical circuits within cargo holds should be properly isolated while the cargo is on board. Welding or any other form of hot work that could affect the cargo should not be permitted while the fertilizer is on board.

In case of bagged fertilizer, it is of importance that the surveyor should check the quality and quantity of the fertilizer during loading and discharging, together with the storage facilities at the discharging port.

MS Amlin recommends appointing professional services of a qualified cargo surveying company to assist the Master prior and during loading.



Pieter Bruins
Loss Prevention Executive

For any queries on this topic, please do not
hesitate to contact our Client Services Desk:
ClientServices@msamlin.com

MS Amlin offices

London, Paris, Antwerp, Rotterdam, Hamburg,
Dubai, Singapore and Hong Kong

MS Amlin

Client Services Desk
Fascinatio Boulevard 622
2909 VA Capelle a/d IJssel
The Netherlands

Tel: +31 10 242 5000

msamlin.com/pandi

© February 2019. The information contained herein is intended to be for informational purposes only and is correct at the time of printing. This brochure is not, and is not intended to be construed as, an offering of MS Amlin securities in the United States or in any other jurisdictions where such offers may be unlawful. The services and products mentioned in this brochure may not be available in the United States or in jurisdictions where Lloyd's does not have a trading license. Potential insureds should consult with an appropriately licensed broker in their area for further information.

MS Amlin Underwriting Limited is authorised by the Prudential Regulation Authority and regulated by the Financial Conduct Authority and the Prudential Regulation Authority under reference number 204918. Registered office The Leadenhall Building, 122 Leadenhall Street, London EC3V 4AG. Registered in England Company No. 02323018.

MS Amlin Marine N.V. is registered in the Netherlands no 24448058. Registered address: Fascinatio Boulevard 622, 2909 VA Capelle a/d IJssel, Netherlands.

MS Amlin (MENA) Limited is regulated by the Dubai Financial Services Authority (DFSA). MS Amlin (MENA) Limited may only undertake the financial services activities that fall within the scope of its existing DFSA licence. MS Amlin (MENA) Limited's principal place of business in the DIFC is MS Amlin (MENA) Limited, Level 3, Precinct Building 2, Dubai International Financial Centre, Dubai, United Arab Emirates. P.O. Box 506929. This document is intended for Professional clients only as defined by the DFSA and no other person should act upon it.

MS Amlin Asia Pacific Pte Limited is approved by the Monetary Authority of Singapore to underwrite on behalf of the members of Syndicate 2001 at Lloyd's. Registered in Singapore No. 200711910C Registered office 138 Market Street #03-01 CapitaGreen Singapore 048946. Registered Non-Hong Kong Company 35F Central Plaza, 18 Harbour Road, Wanchai, Hong Kong Cr. F0021764